


USER MANUAL

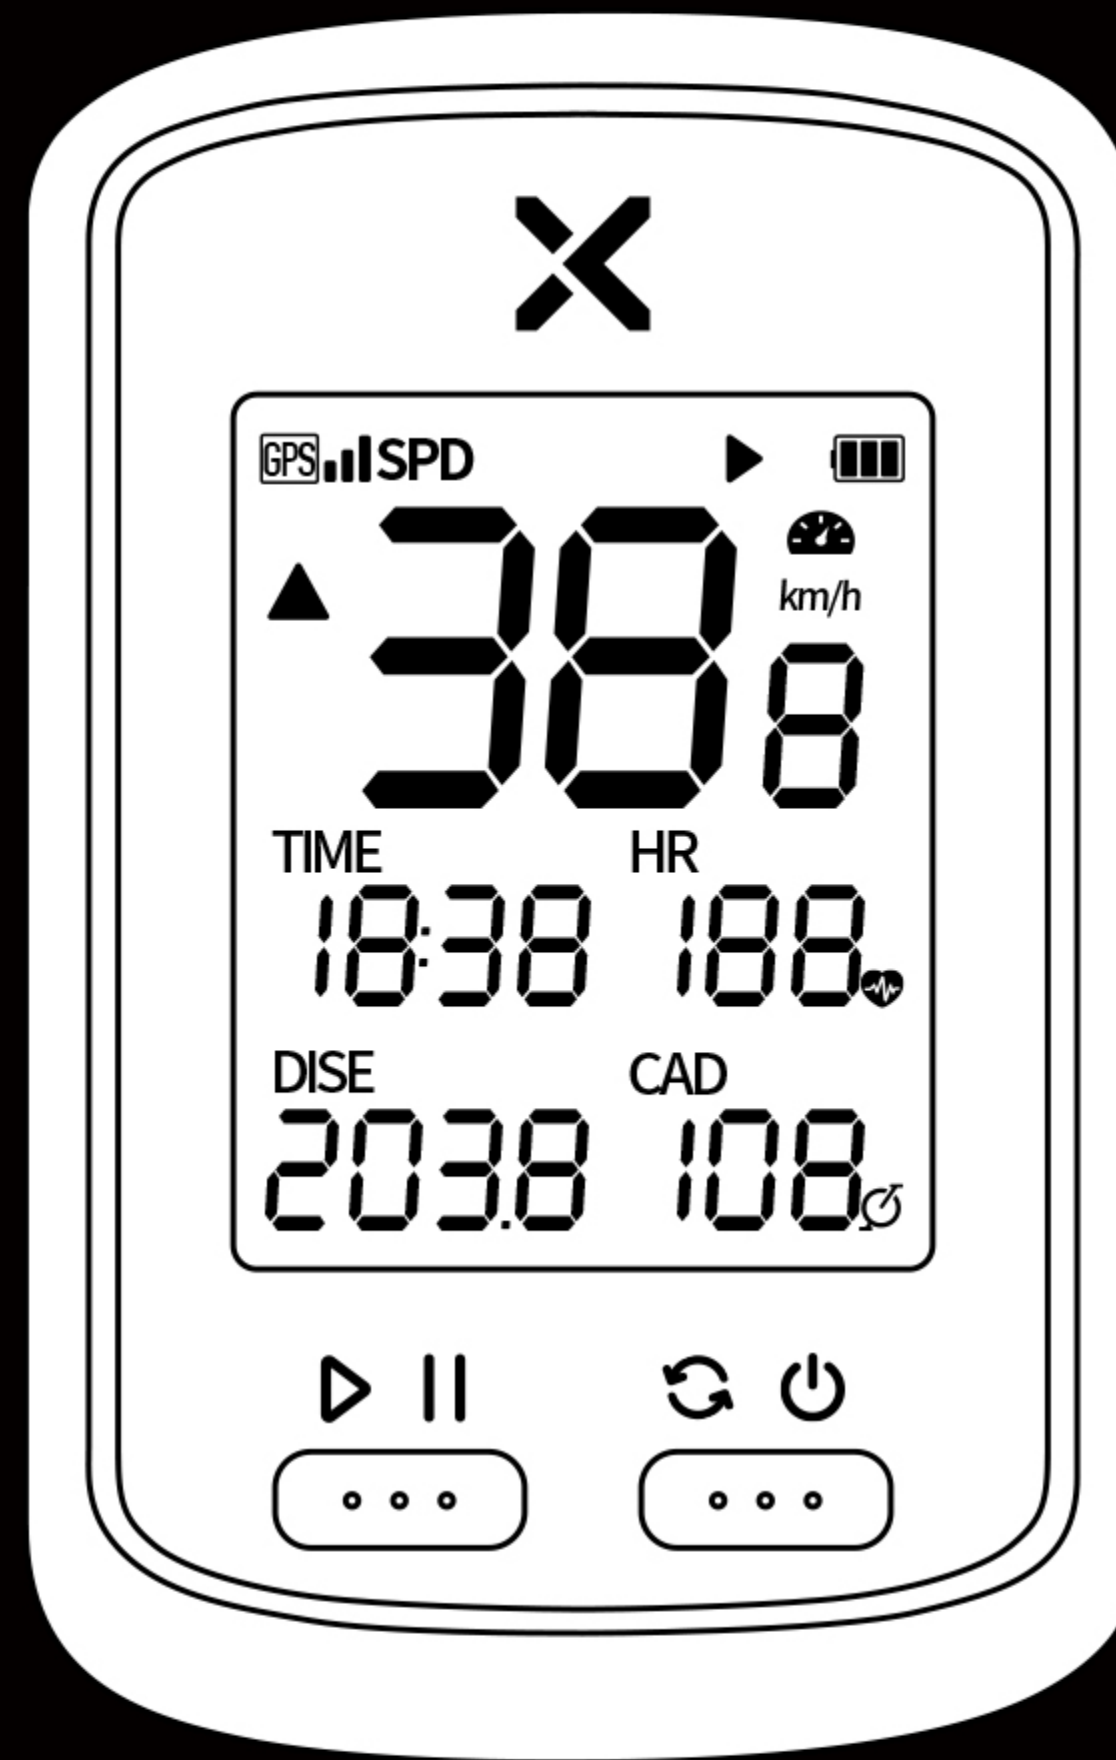


XOSS G+
GPS CYCLING COMPUTER


GPS LOCATION – QUICK START GUIDE

To receive satellite signals, please remain static and make sure your device is used in an open space and barrier-free area.


- 1 LONG PRESS THE RIGHT BUTTON TO TURN ON.

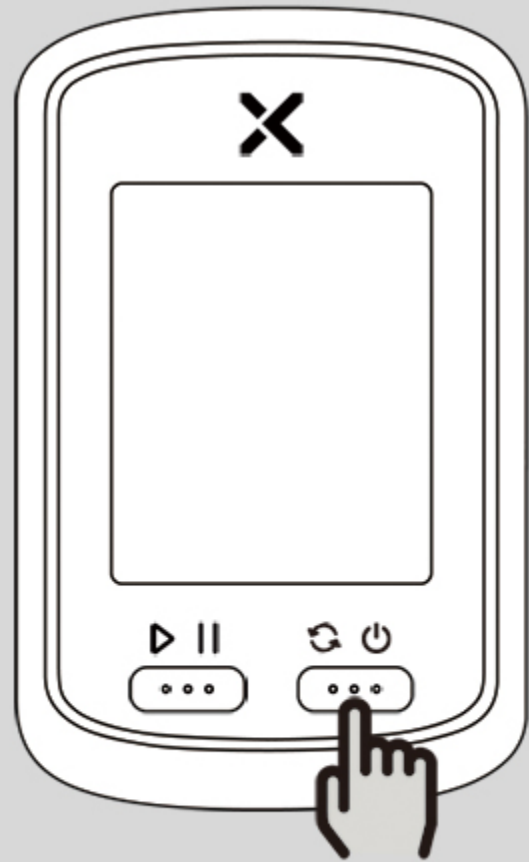

- 2 PRESS THE LEFT BUTTON TO ACTIVATE GPS.

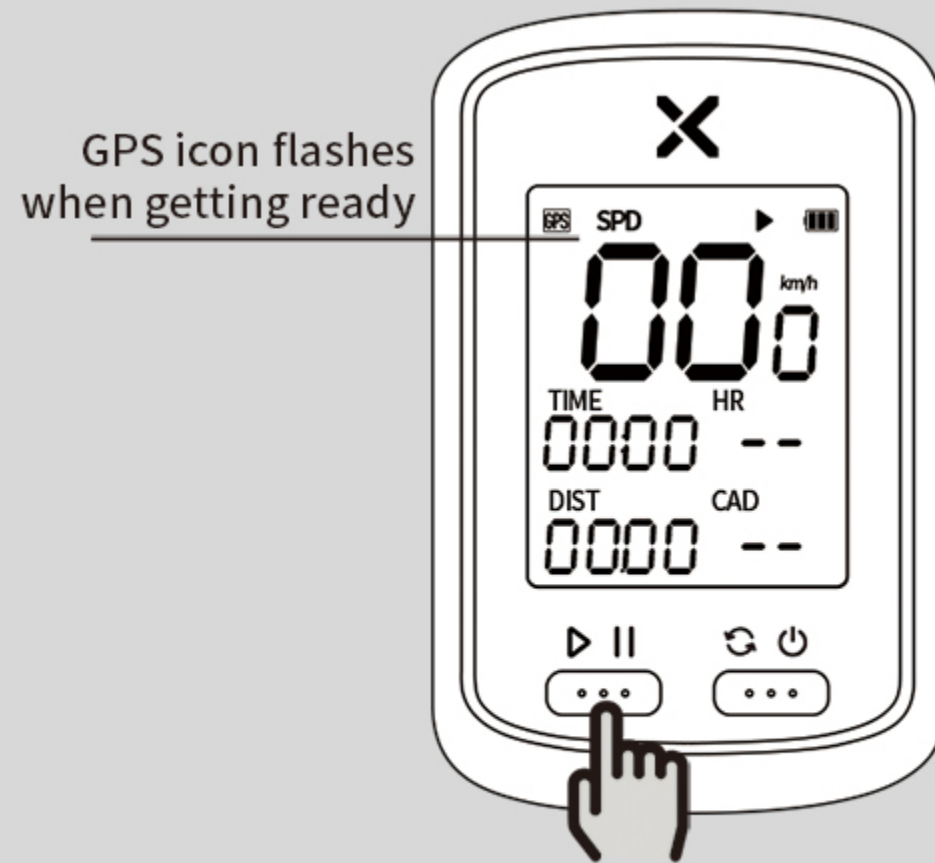

- 3 GET GPS SIGNAL AFTER START UP TAKES A FEW MINUTES.

 appears solid with BEEP prompt to indicate the device is ready.



- 4 ENJOY YOUR RIDE.



1.INTRODUCTION

SPECIFICATIONS

NAME	XOSS G+ GPS Cycling Computer
SIZE	48*75*19mm
PRODUCT WEIGHT	52g
OPERATING TEMPERATURE	-10~50°C
BATTERY	500mAh Rechargeable Lithium Ion
RECORDING TIME	Up to 25 Hours
WATERPROOF	IPX7
DATA	GPS SPD TIME HR CAD DIST GRD ALT CLOCK ODO
ANT+ SENSOR SUPPORT	Speed Sensor, Cadence Sensor,Heart Rate Monitor, Speed/Cadence Sensor.

START/PAUSE RECORDING ③
Press the Left Button

RESUME/PAUSE ④
Press the Left Button

END RECORDING ⑤
Long press the left button

1 POWER ON/OFF
Long press the right button

2 SWITCH DATA DISPLAY
Press the right button

RECORD 15 TYPES of DATA

SPD (CURRENT SPEED)	HR (CURRENT HEART RATE)	CAD (CURRENT CADENCE)	TIME (TIME)	DIST (DISTANCE)
AVG (AVERAGE SPEED)	AVG (AVERAGE HEART RATE)	AVG (AVERAGE CADENCE)	ALT (ALTITUDE)	GRD (GRADE)
MAX (MAX SPEED)	MAX (MAX HEART RATE)	MAX (MAX CADENCE)	CLOCK (CLOCK)	ODO (ODOMETER)

MAX
59.6
CLOCK 05:40
MAX 85
ODO 139.3k
MAX 68



AVG
18.8
ALT 0020m
AVG 25
GRD 005.8%
AVG 02

GPS SPD
32.8 km/h
TIME 08:88
HR 95
DISE 55.28
CAD 75

2.XOSS APP CONNECTION




Scan QR code to download XOSS,
or search XOSS in your APP store.

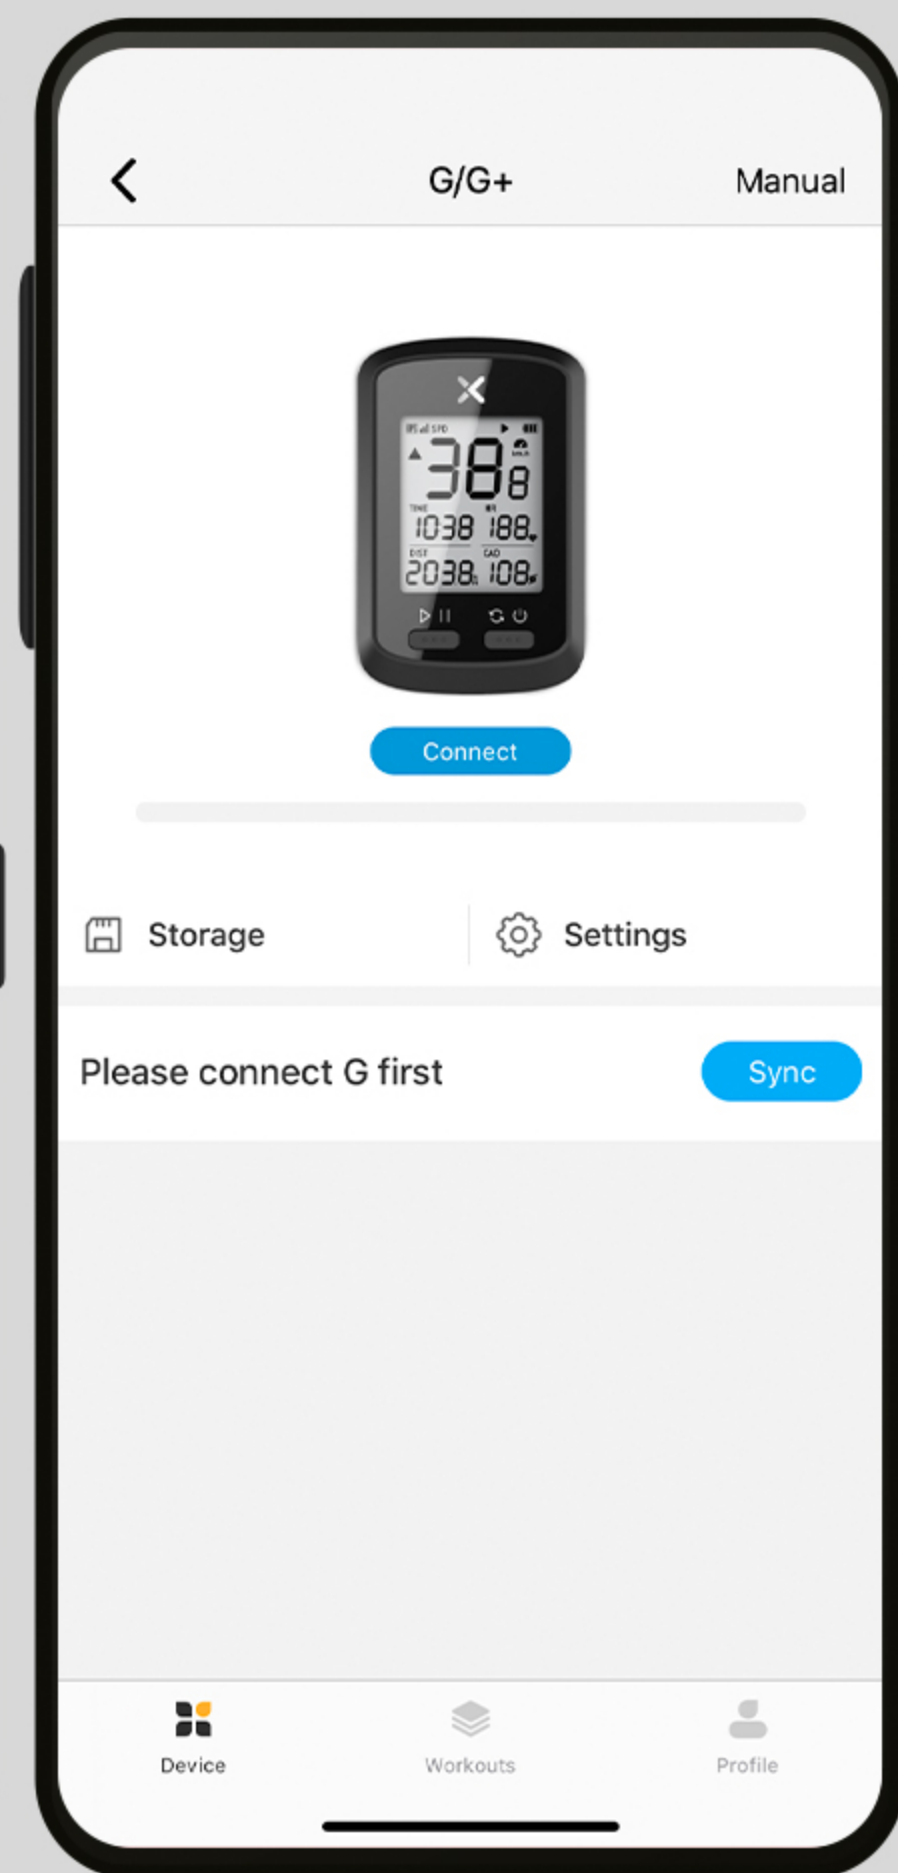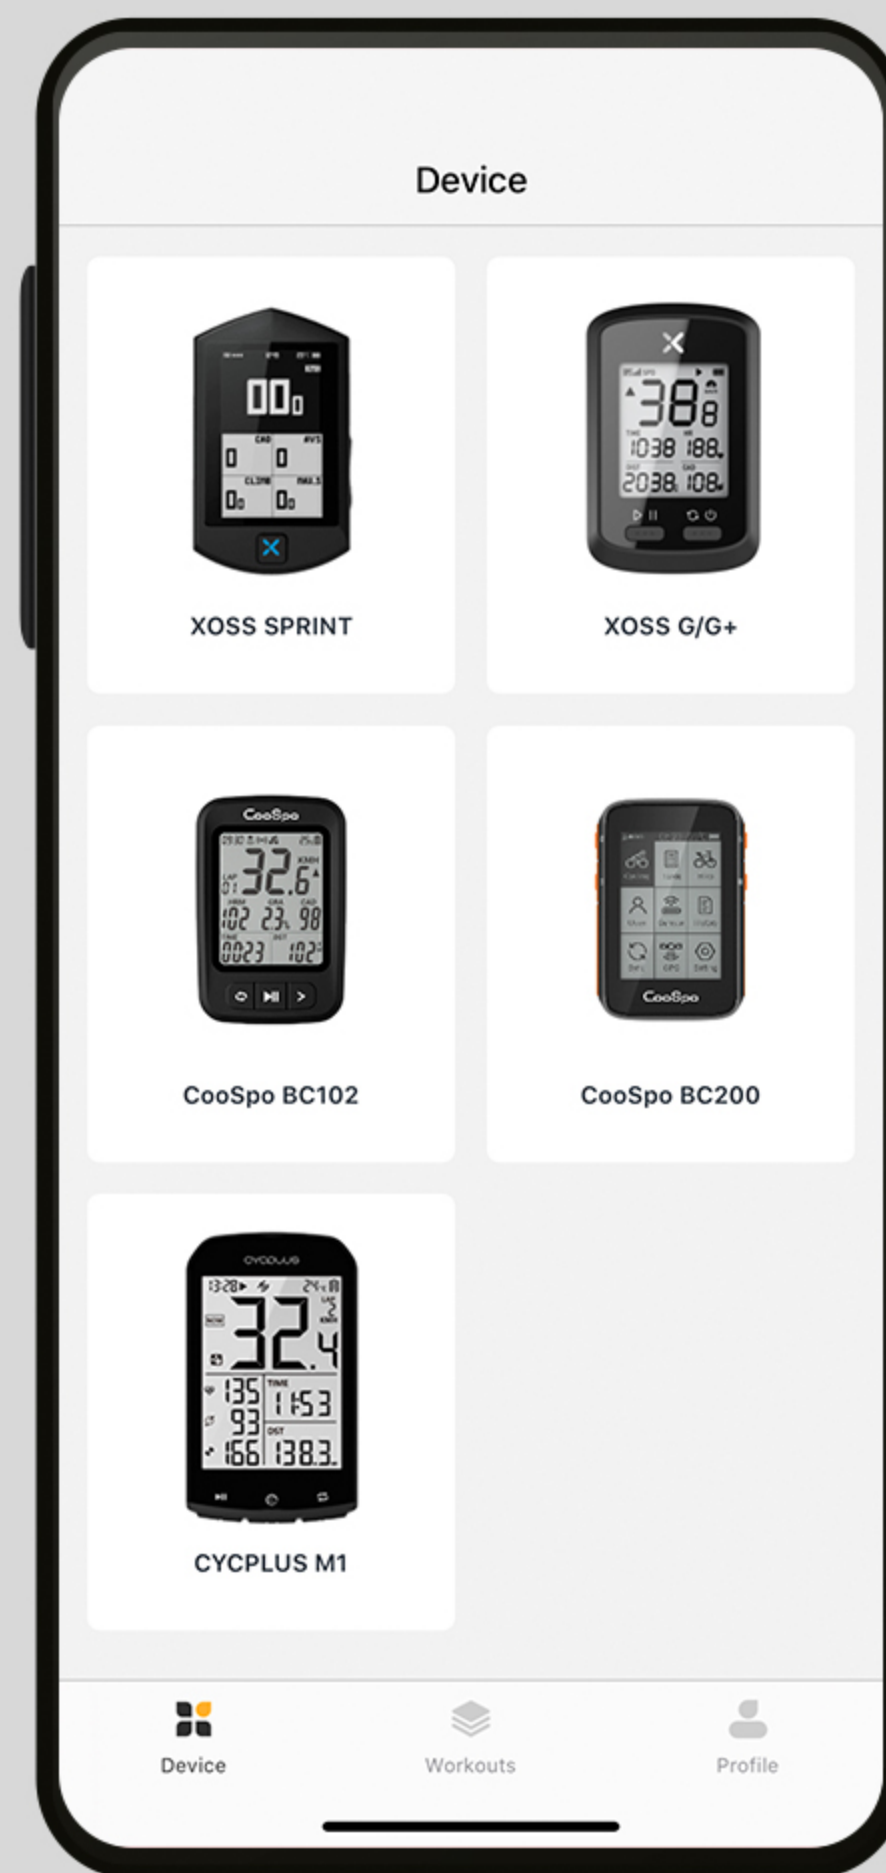

- Turn on XOSS G+ and turn on Bluetooth on the phone,
- Click on device and search for available devices.
- Select XOSS G+ for pairing.

The APP is designed for Bluetooth 4.0 and later versions.

3.XOSS APP SETTINGS

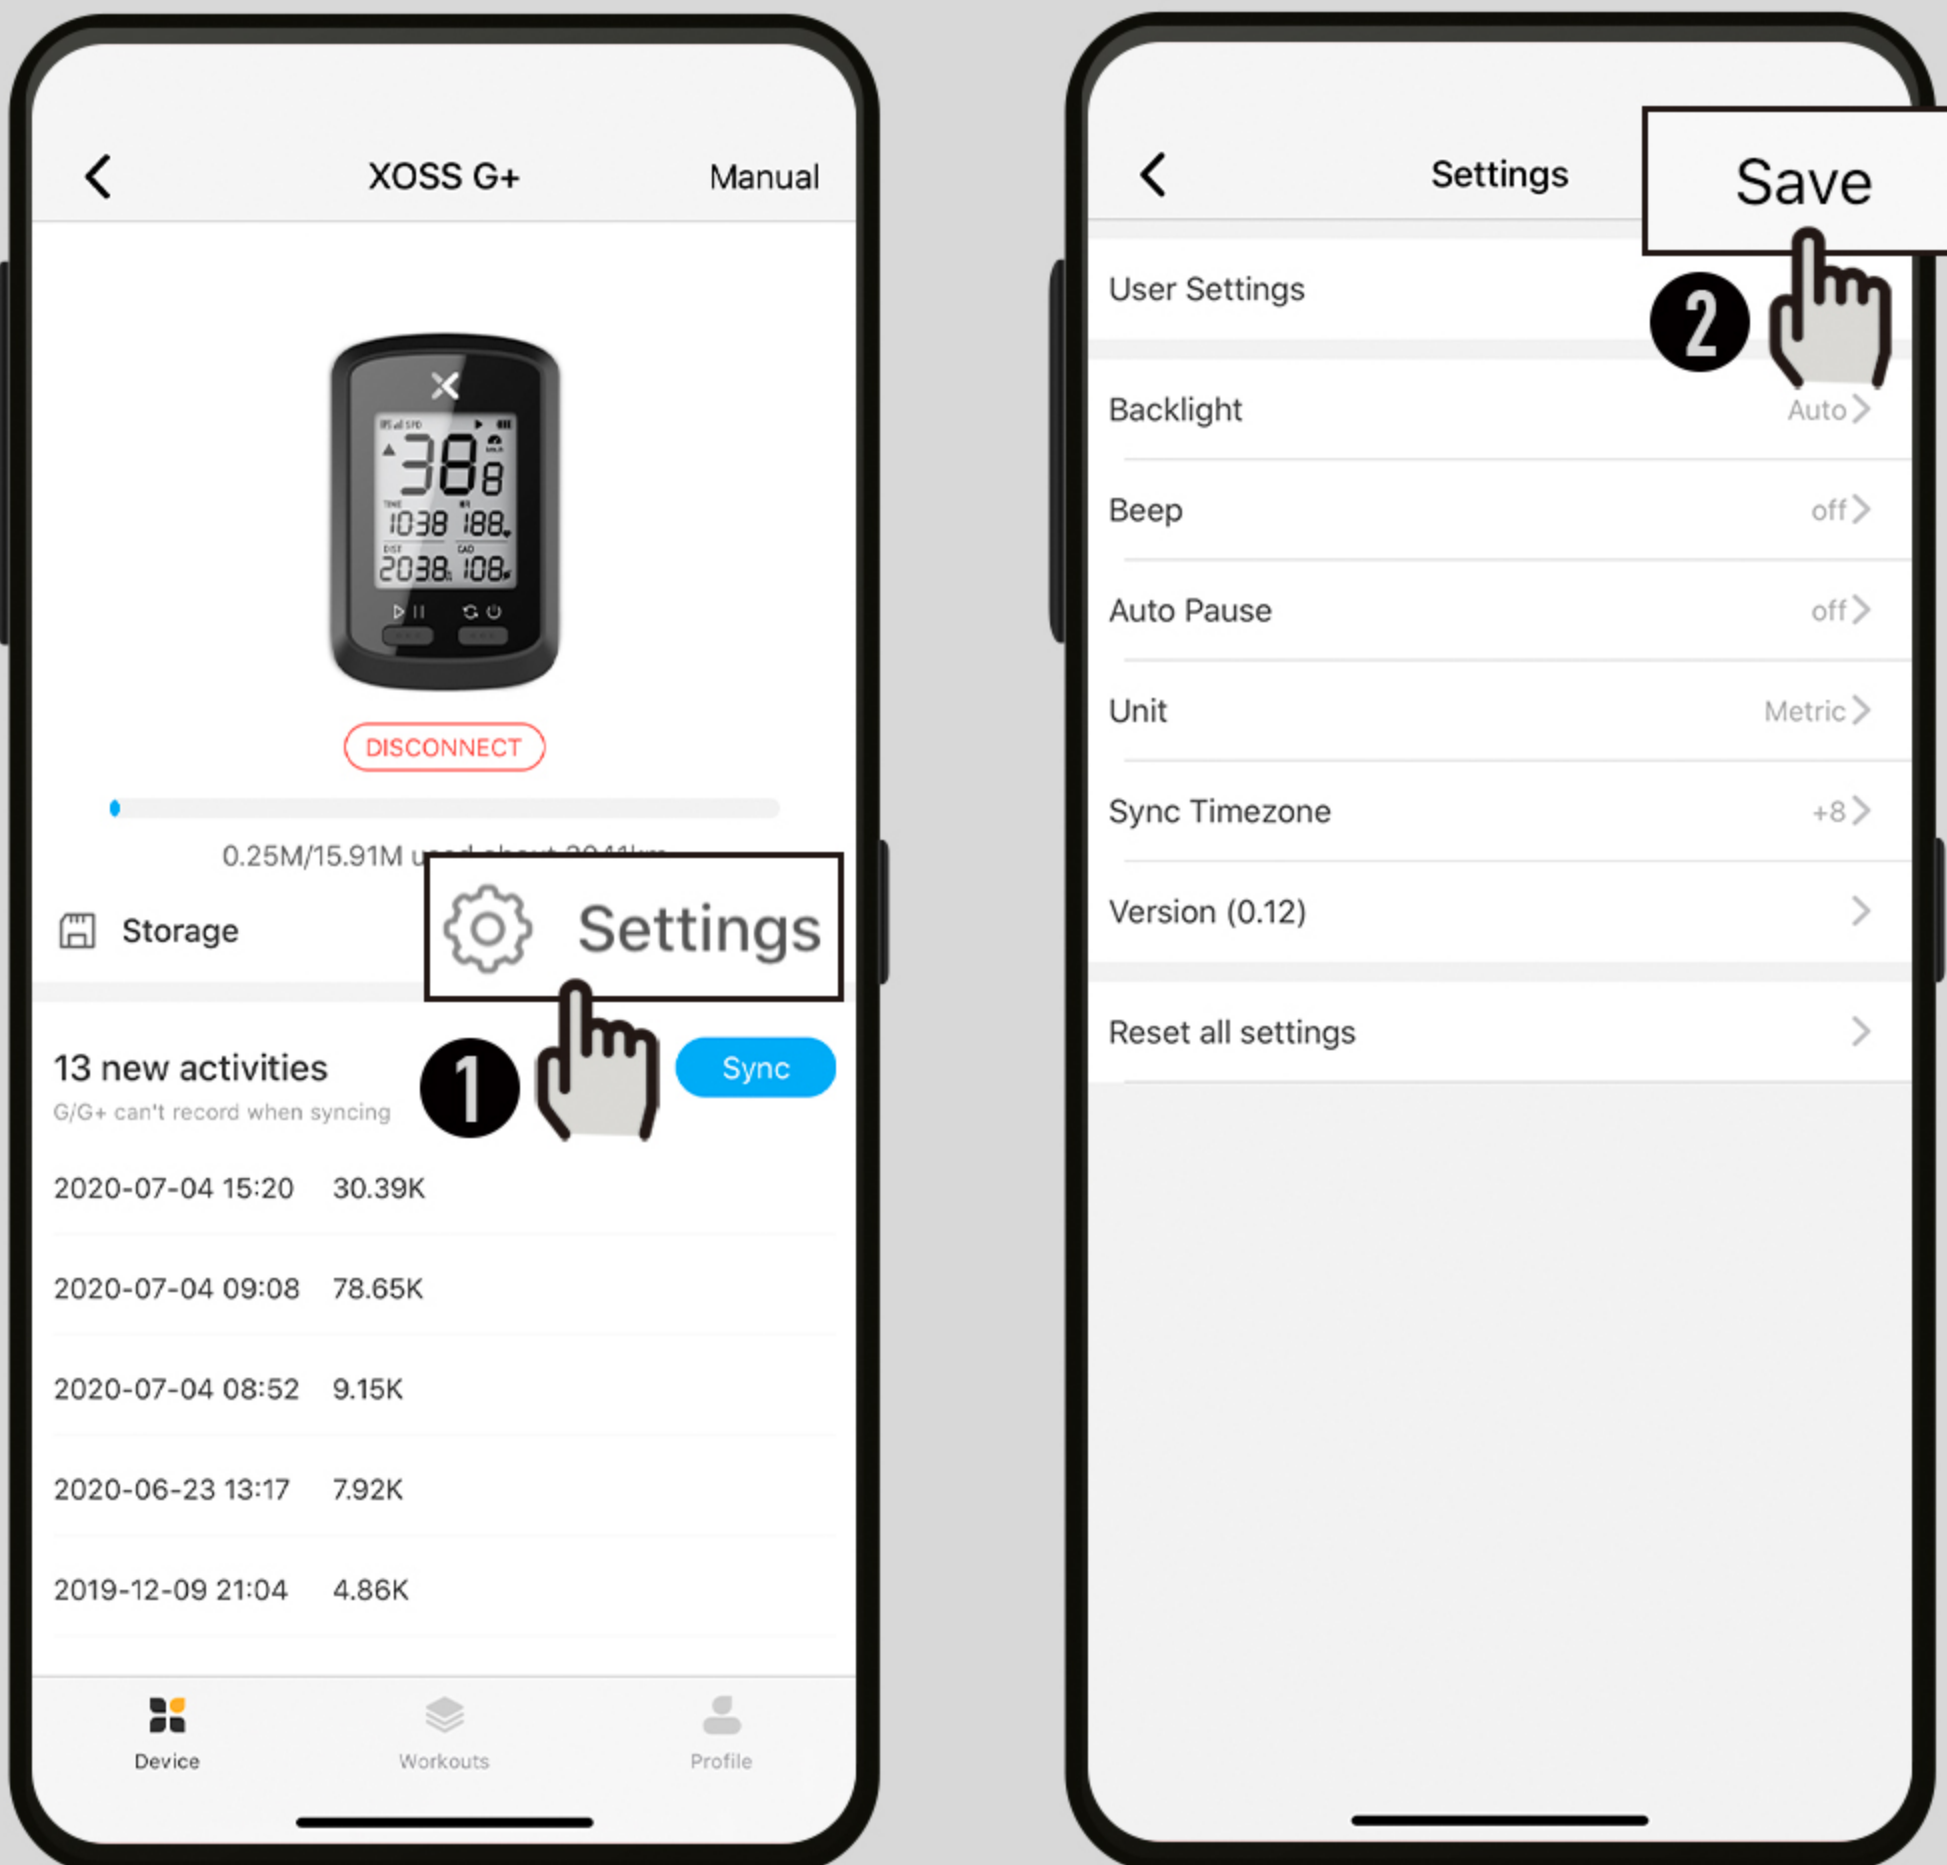

After connecting XOSS G+ with XOSS app, click settings to modify the features below.

- USER SETTINGS
- BACKLIGHT
- BEEP
- AUTO PAUSE
- UNIT
- SYNC TIMEZONE

Click **SAVE** after modification.

Note: RESET is used for restoring factory default setting, but not riding data.

SUPPORT

Speed Sensor


Heart Rate Monitor

Cadence Sensor

Speed/Cadence Sensor




1

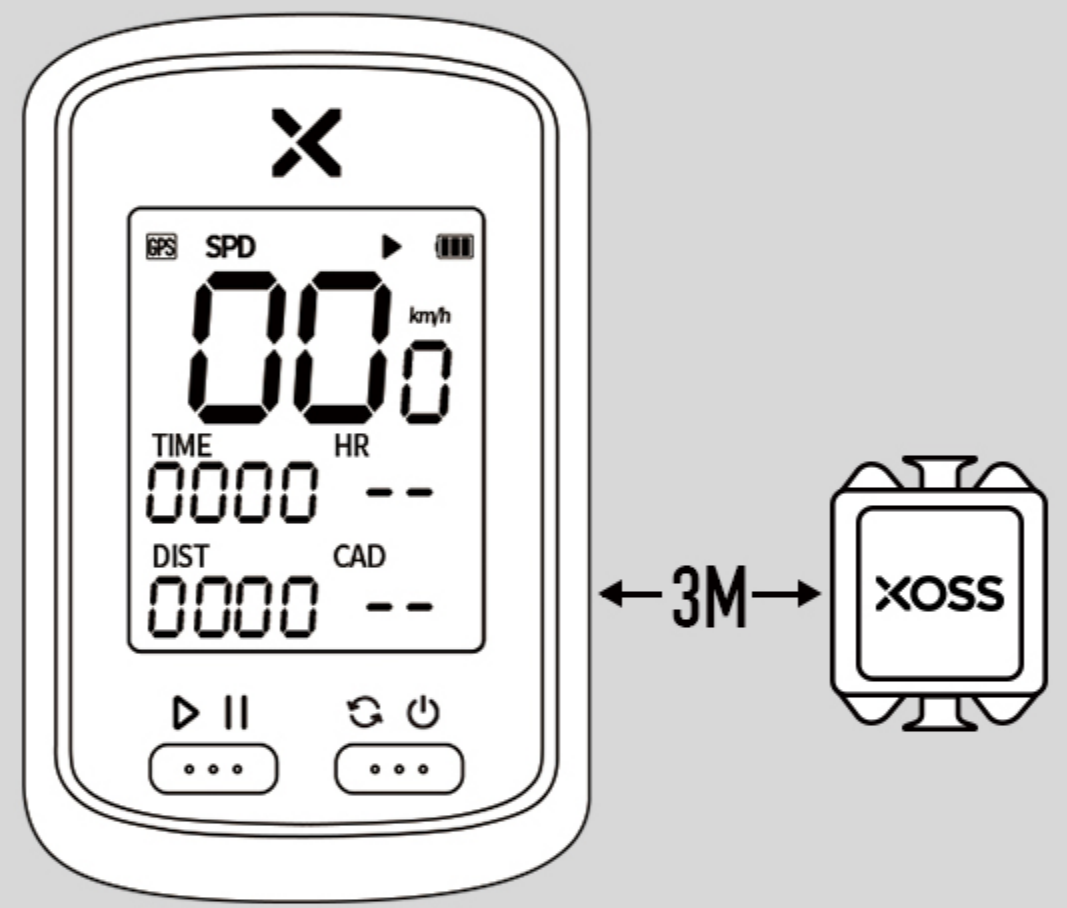


Bring the device within 3m of your sensors, and stay 10m far away from other rider's sensors.

2

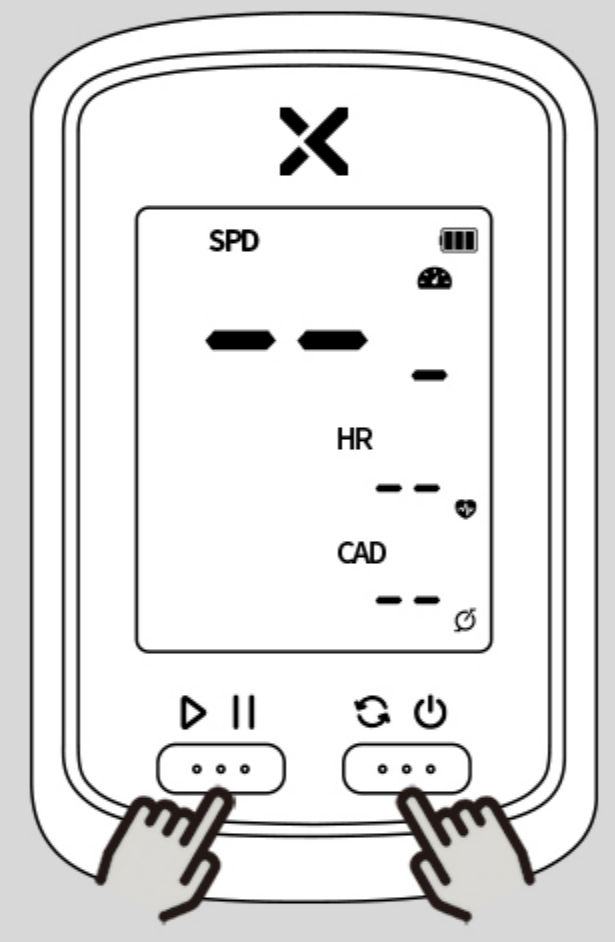

Press both buttons simultaneously on G+ until the icon is flashing, which indicates the XOSS G+ is searching active sensor nearby.

3

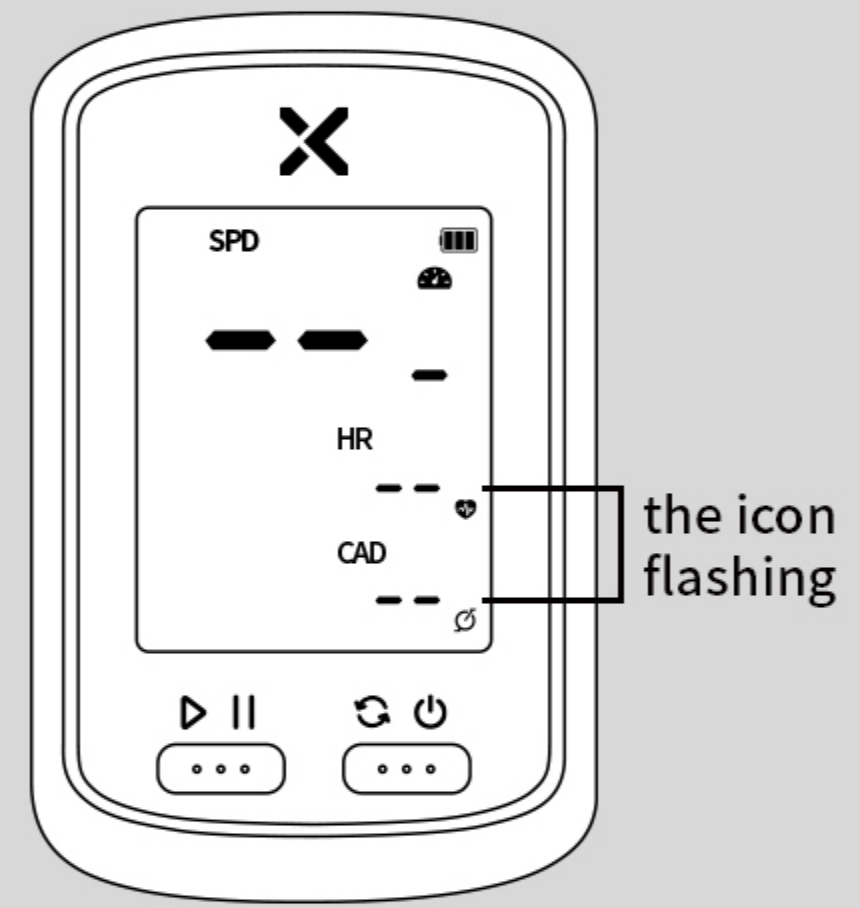

If the pairing succeeds, the icon will remain static, press the right button again, enter into settings interface.

[CIRCUMFERENCE] [METRIC/IMPERIAL] [TIME ZONE] SETTINGS


4



TIRE CIRCUMFERENCE SETTING(MM)

Press the left button to set number or option.


5

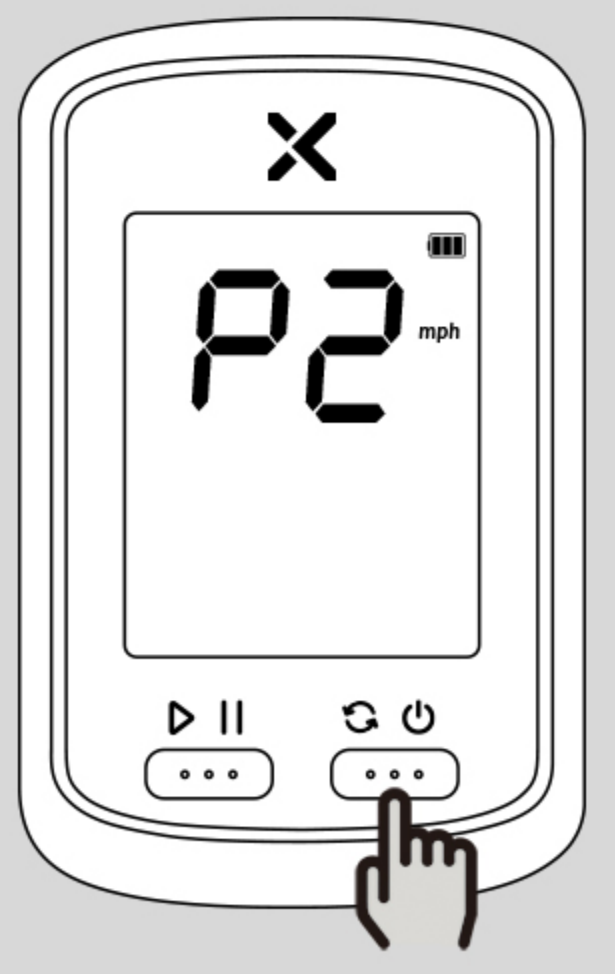

METRIC/IMPERIAL UNIT SETTING

Press the right button to switch.

6

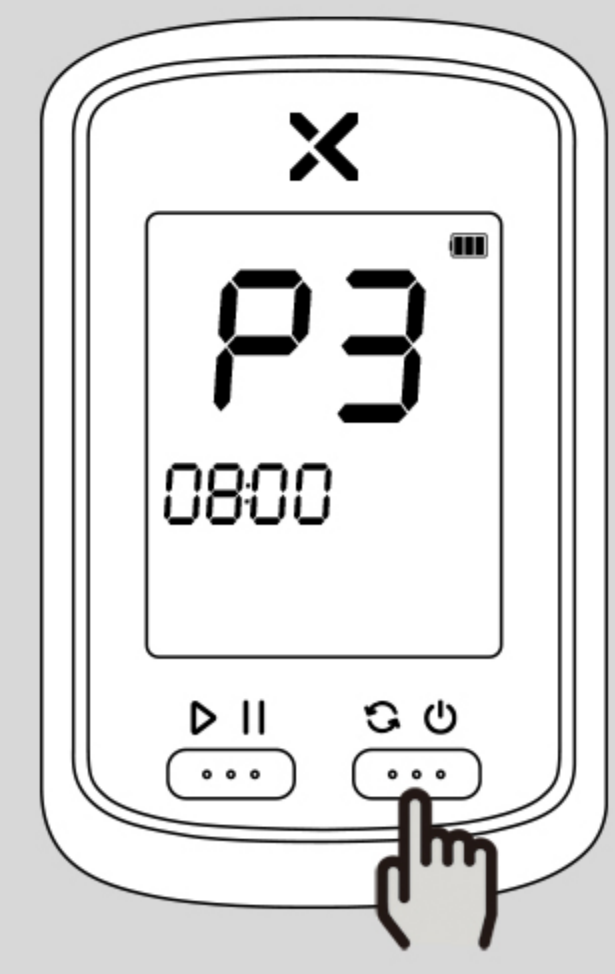


TIME ZONE SETTING

After setup, long press the right button to exit the settings.


5.SYNC TO STRAVA/TRAININGPEAKS

Long press the left button to end your recording after every ride and sync your riding activities with the App

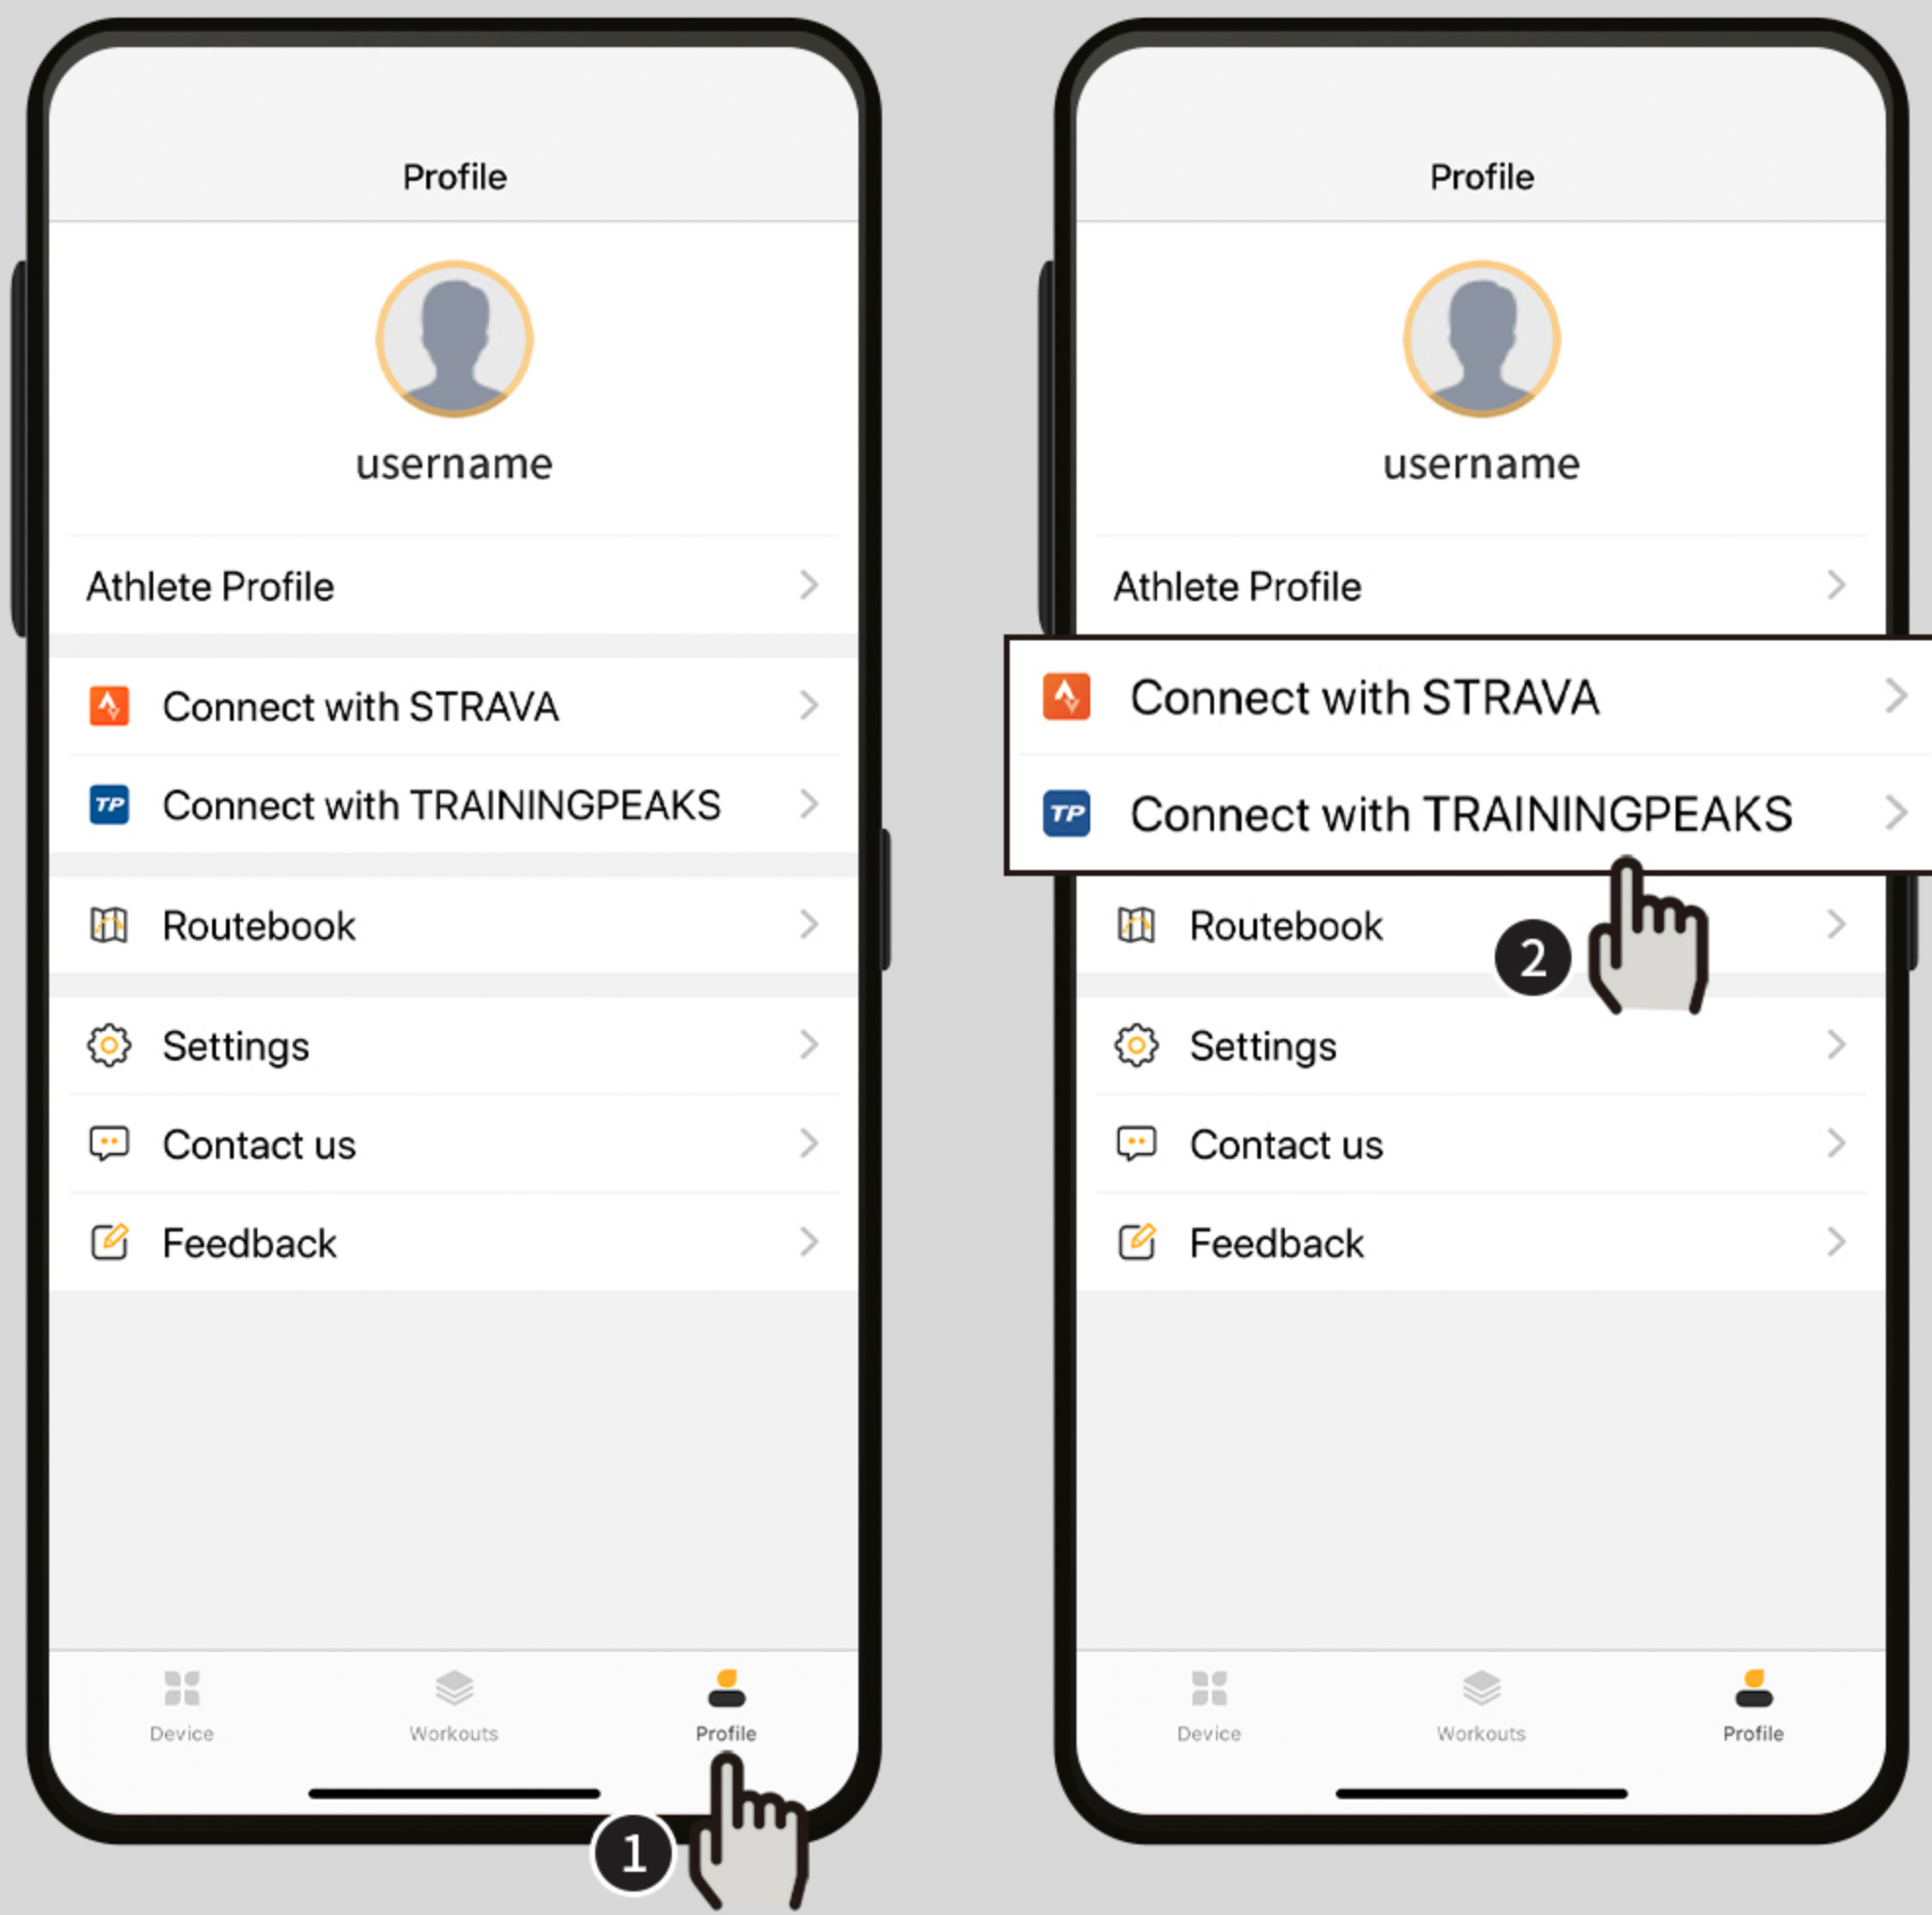

Click on Profile, connect your Strava/TrainingPeaks account with XOSS.
Please note, your riding activities only can sync to your Strava/TrainingPeaks account after the connection succeeds.

6.UPGRADE FIRMWARE

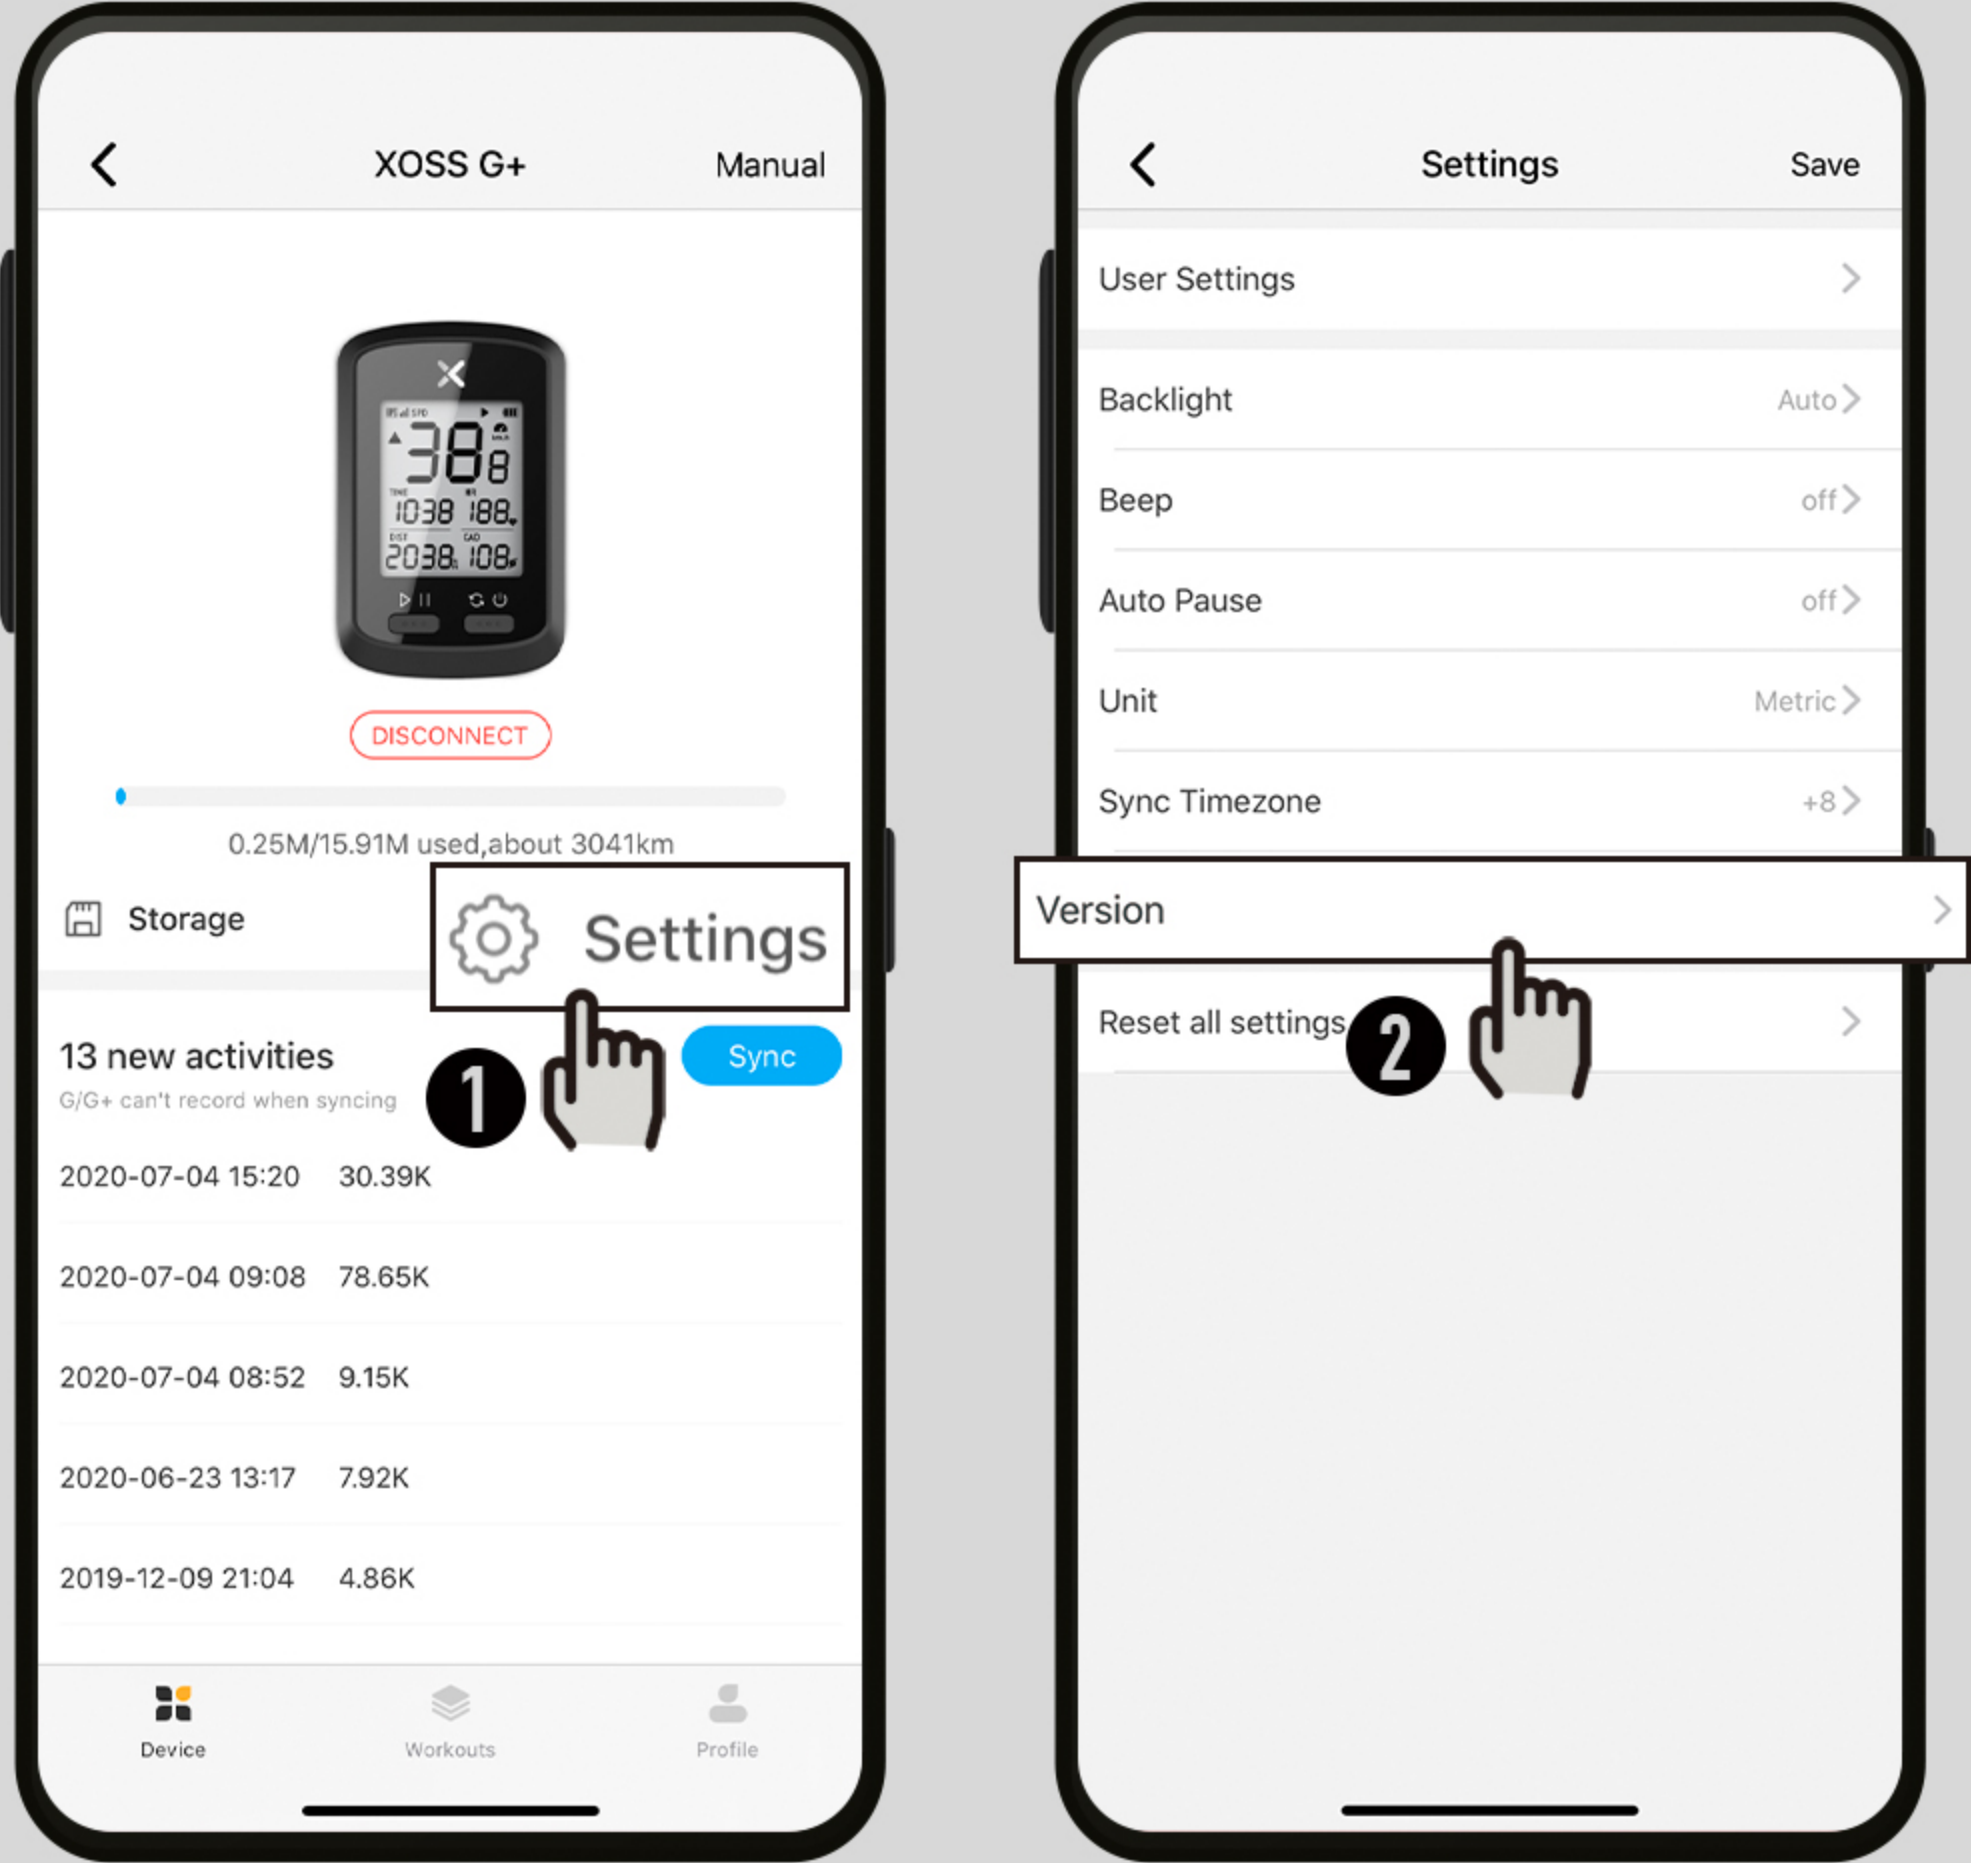

You are suggested to update the firmware from time to time.


Note:make sure your Bluetooth is on and XOSS G+ is turned on.

7.PACKING LIST



XOSS G+

GPS Cycling Computer*1

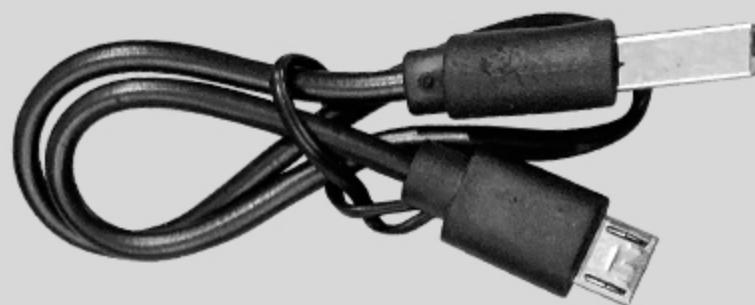

Micro USB Cable*1



Rubber Bands*2



Cycling Computer Mount*1



Protection Rubber Pad*1

WARRANTY

Thank you for purchasing our product. We offer a one-year manufacturer's warranty from the date of purchase. For details, please contact your retailer.

Our warranty does not apply to:

a. Battery

b. Misuse, abuse or damage caused by human factors


c. Any unauthorized disassembly

XOSS HONG KONG CO., LIMITED

ROOMS 1318-9, HOLLYWOOD PLAZA, 610 NATHAN ROAD, MONGKOK, KL, HONG KONG

Any questions or more information, please contact us via support@xoss.co

Visit our website for more products xoss.co



FCC ID:2AJFWXOSSG